

PEACH SPRINGS LOT 52

HURRICANE, UT

DRAWING INDEX					
SHEET NUMBER	SHEET TITLE				
G-1	COVER SHEET	A-2	FOUNDATION PLAN	A-5	SECTION AND DETAILS
C-1	SITE PLAN	A-3	ROOF OVERVIEW	E-1.0	MAIN FLOOR ELECTRICAL PLAN
A-1.0	MAIN FLOOR PLAN	A-4.0	ELEVATIONS I	E-1.1	UPPER FLOOR ELECTRICAL PLAN
A-1.1	UPPER FLOOR PLAN	A-4.1	ELEVATIONS II		

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

COVER SHEET

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026


DATE: 7/29/26

REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

G-1

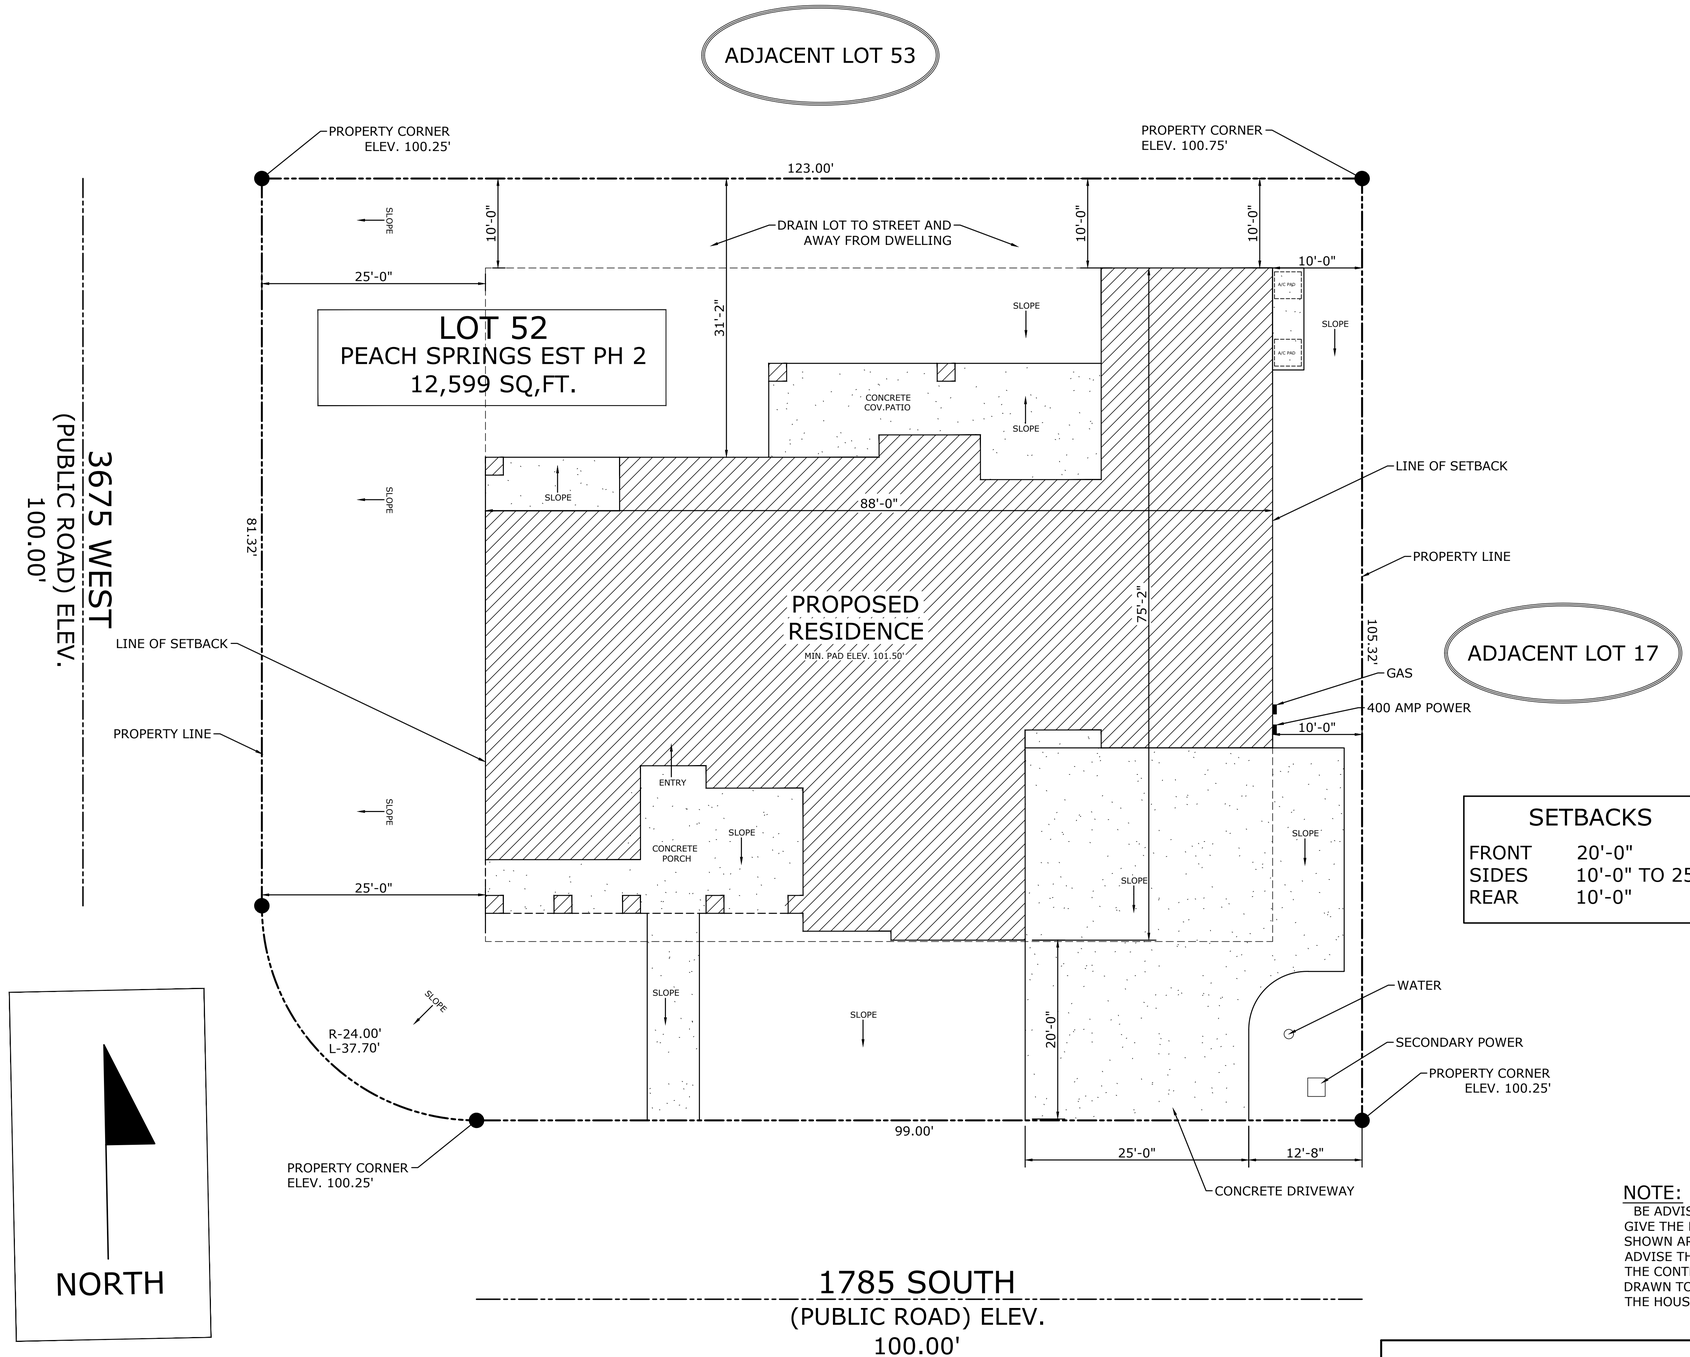

SETBACKS

FRONT	20'-0"
SIDES	10'-0" TO 25'-0"
REAR	10'-0"

NOTE:
BE ADVISED: THE CITY PLAT MAPS DO NOT GIVE THE BUILDING OFFSETS. THE OFFSETS SHOWN ARE AN ESTIMATE. WE WOULD ADVISE THAT THE OFFSETS BE VERIFIED BY THE CONTRACTOR BEFORE THE PLANS ARE DRAWN TO AVOID THE POSSIBILITY THAT THE HOUSE MAY NOT FIT ON THE LOT.

SITE NOTE:

BEFORE CONSTRUCTION BEGINS BUILDER IS TO:
VERIFY LOT DIMENSIONS AGAINST SITE PLAN DIMENSIONS.
VERIFY BUILDING LOCATION AND ACCESS WITH OWNER.
VERIFY LOCATION OF WATER, SEWER AND UTILITIES ON SITE.
VERIFY PROPERTY CORNER AND BUILDING PAD ELEVATIONS.

SITE PLAN

SCALE: 1/8" = 1'-0"

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

SITE PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT © CORTNEY HASLEM DESIGNS 2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

C-1

SHEET SCALE: 1/8" = 1'-0"

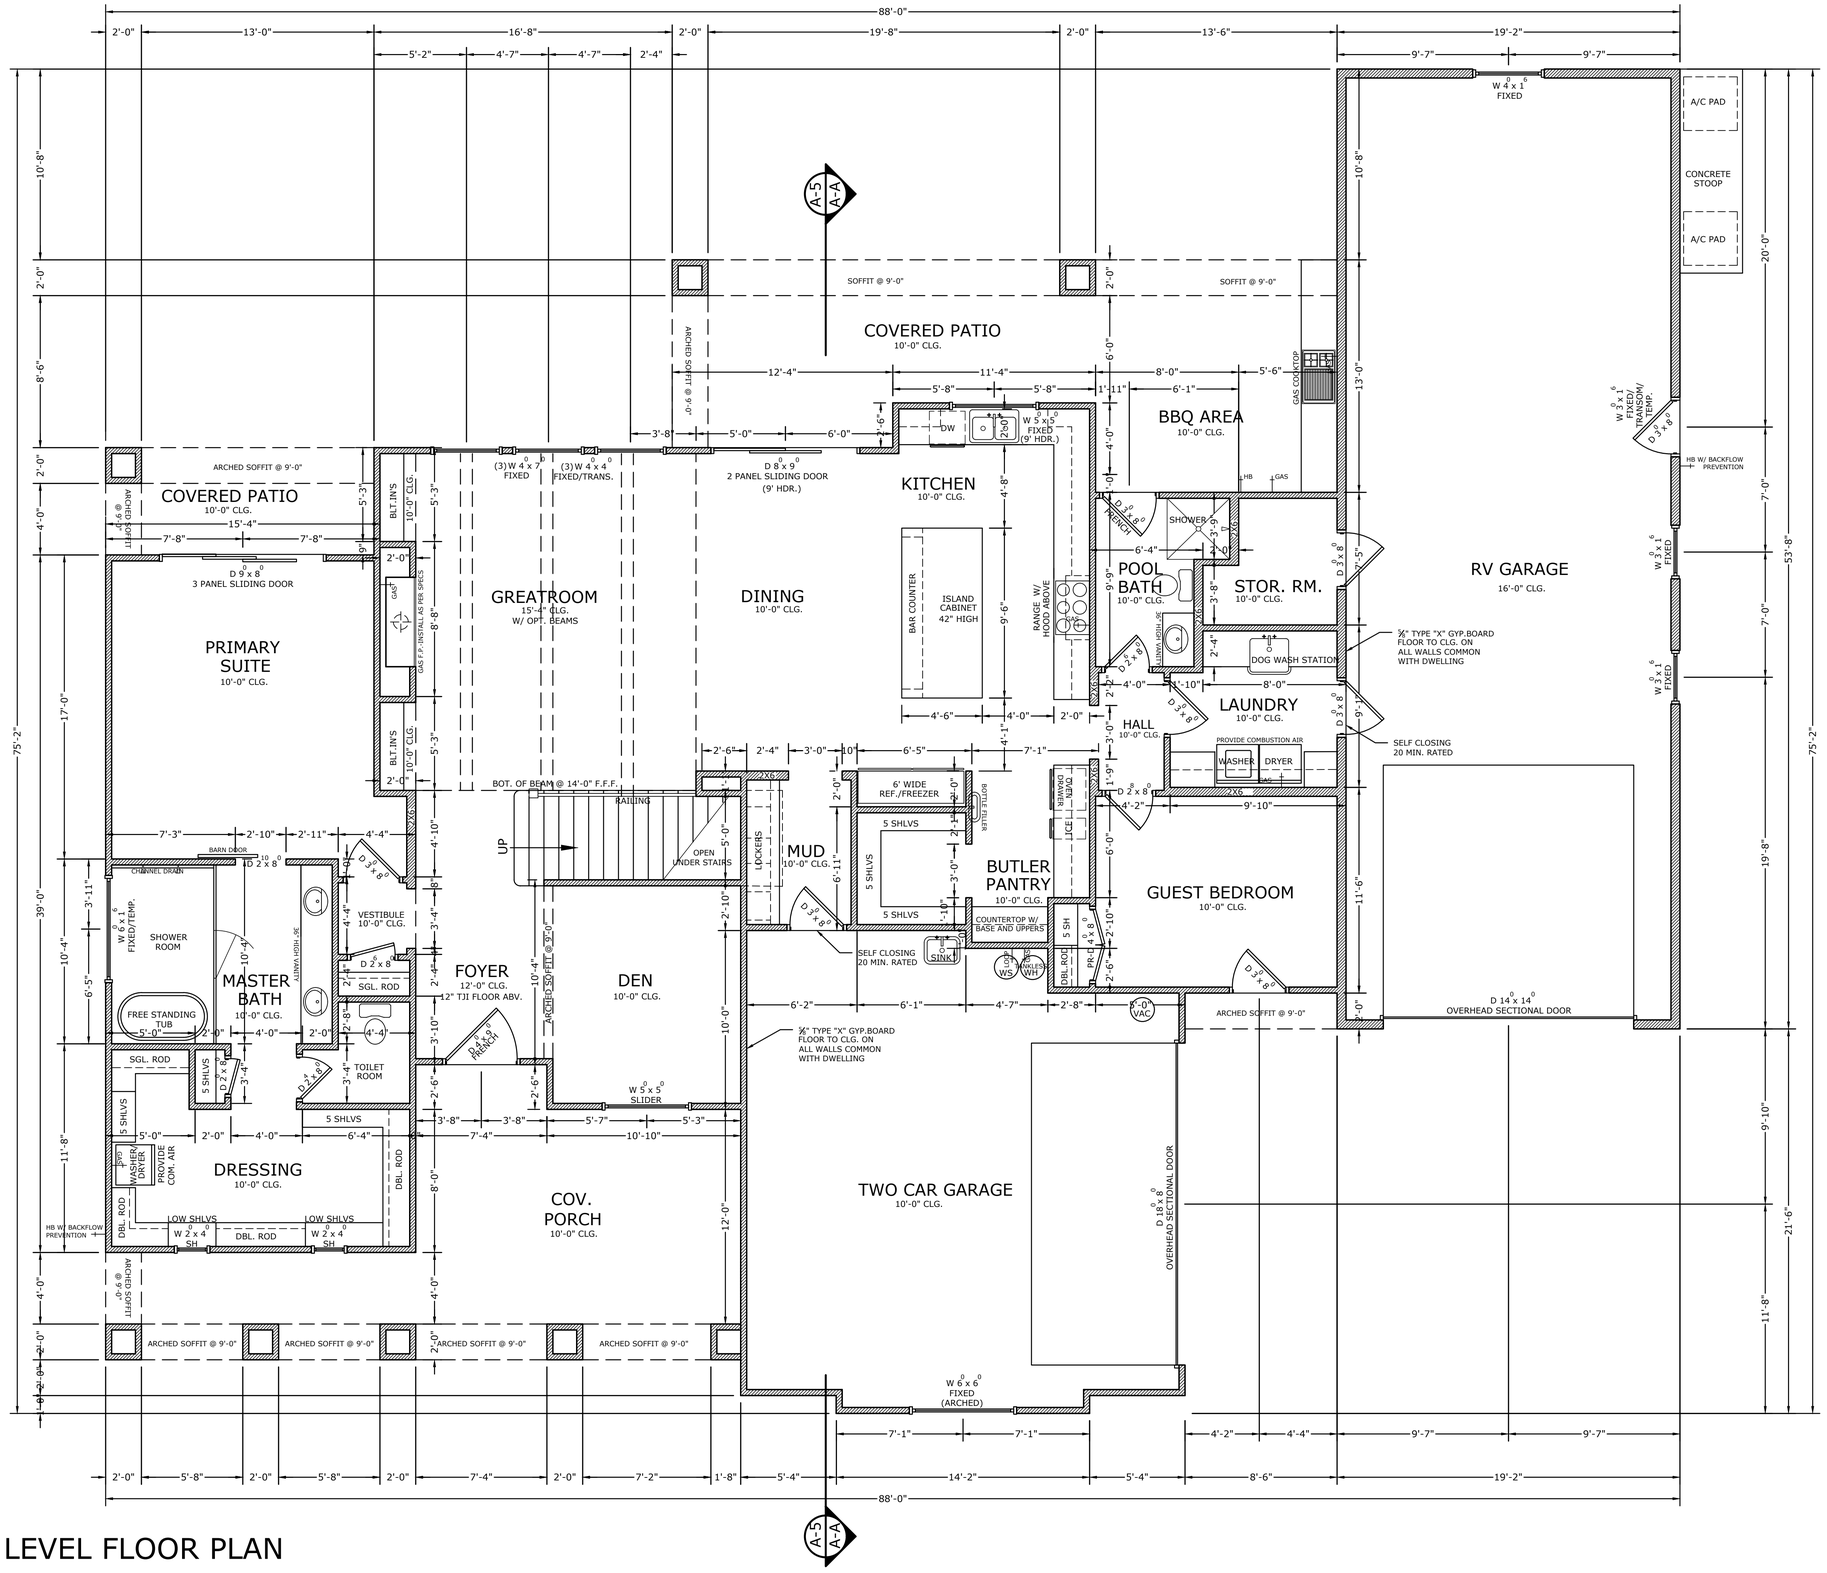

MAIN LEVEL FLOOR PLAN

SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO THE FACE OF FRAMING MATERIAL OR FACE OF THE SHEATHING - EXTERIOR SHEATHING ALIGNS WITH THE FACE OF THE FOUNDATION.
2. UNLESS NOTED OTHERWISE . . .
   EXTERIOR WALLS = 2x4
   INTERIOR WALLS = 2x4
   PLUMBING WALLS = AS NOTED
3. ALL WOOD IN CONTACT WITH CONCRETE IS TO BE PRESERVATIVE TREATED.
4. ALL WINDOW FRAMES AND EXTERIOR BASE PLATES ARE TO BE SET IN A SOLID BED OF POLYMER FOAM SEALANT.
5. ALL CONSTRUCTION SHALL COMPLY WITH THE 2021 I.R.C. AND APPLICABLE LOCAL ORDINANCES.
6. VERIFY LOCATIONS OF ALL UTILITY LINES BEFORE PROCEEDING WITH ANY WORK THAT MAY AFFECT THEM.
7. ALL NEW CONCRETE WALKS HAVE A MINIMUM OF 2% CROSS SLOPE TO DRAIN AWAY FROM BUILDING.
8. PROVIDE A 4" MINIMUM LAYER OF GRANULAR 3/4" DIA. FILL UNDER WALKS & CURBS, UNLESS SHOWN OTHERWISE.
9. PROVIDE SOLID BLOCKING AT SIDES OF GLAZING FOR WINDOW TREATMENT ANCHORS.
10. FIREPLACE TYPE & SIZE TO BE ICBO APPROVED AND OWNER/BUILDER VERIFIED.
11. FLOOR COVERINGS, BASE AND TRIM, MOULDING, AND CABINETRY TO BE DETERMINED BY OWNER.
12. FLOOR DRAINS TO BE INSTALLED AS REQUIRED.
13. HOSE BIBBS LOCATIONS TO BE VERIFIED BY OWNER, HOSE BIBBS SHOULD HAVE BACKFLOW PROTECTORS.
14. WINDOW AND DOOR HEADERS TO BE (2) 2x10'S UNLESS NOTED OTHERWISE. SEE ENGINEERS SPECS.
15. ALL PLUMBING TO BE IN ACCORDANCE WITH CURRENT IPC AND LOCAL CODES.
16. ATTIC ACCESS TO BE A MINIMUM OF 22"x 30" W/ 30" OF HEAD ROOM ABOVE ACCESS. 1 HR. FIRE-RESISTANT CONSTRUCTION & LATCH REQUIRED IN GARAGE ACCESSES AS PER CURRENT I.R.C.
17. SEISMIC TIE-DOWNS TO BE PROVIDED AT ALL WATER HEATERS AS PER CURRENT I.M.C.
18. PROVIDE A MINIMUM CLEARANCE OF 30" IN FRONT OF ALL WATER HEATERS.
19. PROVIDE A MINIMUM CLEARANCE OF 36" IN FRONT OF FURNACE FOR SERVICING.
20. ALL PLUMBING VENTS THROUGH ROOF TO BE 2" PIPE MINIMUM. ALL PENETRATIONS THROUGH ROOF SHALL BE 5'-0" MIN. FROM ANY PARTY WALLS AND SHALL BE 2'-0" ABOVE OR 10'-0" AWAY FROM ALL EXTERIOR AIR INTAKE OPENINGS.
21. FLUE AND EXHAUST VENTS WILL TERMINATE 4'-0" BELOW OR 4'-0" HORZ. AND AT LEAST 1'-0" ABOVE A DOOR, OPERABLE WINDOW, OR GRAVITY AIR INLET.
22. GAS METER AND MAIN SHUTOFF TO BE LOCATED AS PER CURRENT I.M.C.
23. LICENSED CONTRACTOR TO VERIFY ALL DIMENSIONS AND SPECIFICATIONS ON SITE.
24. A BACK WATER VALVE IS REQUIRED TO PROTECT PLUMBING FIXTURES THAT ARE LOCATED BELOW THE ELEVATION LEVEL OF THE NEAREST UPSTREAM MAN HOLE COVER. FIXTURES THAT ARE ABOVE THE ELEVATION LEVEL OF THE MANHOLE COVER SHALL NOT DISCHARGE THROUGH THE BACKWATER VALVE.
25. SHOWER STALLS AND BATHTUBS WITH SHOWER HEADS INSTALLED, SHALL HAVE WALLS FINISHED WITH A NON-ABSORBENT SURFACE FOR A MIN. OF 72" ABV. THE FLOOR. (I.R.C. R307.2)
26. FASTENERS INSTALLED INTO PRESERVATIVE TREATED WOOD ARE TO BE ZINC COATED OR TREATED AS REQUIRED BY IRC R317.3.
27. ALL GRADING AROUND THE HOME WILL SLOPE AT LEAST 5% AWAY FROM THE HOME FOR PROPER DRAINAGE AS REQUIRED BY IRC R401.3
28. BACKFILL IS NOT TO BE PLACED ADJACENT TO BASEMENT WALLS UNTIL BRACING IS IN PLACE AS REQUIRED BY IRC R404.1.7.
29. PROVIDE REQUIRED PERIMETER DRAINS FOR THE FOUNDATION WALLS PER IRC R405.1.
30. PROVIDE DAMP PROOFING AT THE BELOW GRADE FOUNDATION WALLS PER IRC R406.1.
31. MAXIMUM FLOW RATES FOR SHOWER HEADS (2.5 gpm @ 80 PSI), LAVATORY (2.2 GPM @ 60 PSI), SINK FAUCETS (2.2 GPM @ 60 PSI), WATER CLOSETS (1.6 GAL PER FLUSH). FLOW RATES SHOULD MEET REQUIREMENTS OF IRC P2903.2.
32. ALL U-FACTORS SHALL BE DETERMINED BY TESTING IN ACCORDANCE WITH NFRC 100 AND LABELED AS SUCH BY THE MANUF., PER SECTION 102.1.3 OF THE 2006 IECC U-FACTOR - CLIMATE ZONE 5 = 0.35. (NO. UTAH) U-FACTOR - CLIMATE ZONE 3 = 0.65. (SO. UTAH)
33. EXHAUST RATE FOR RANGE HOOD IS NOT TO EXCEED 400 CFM

FIRE PLACE NOTES:

IF FIREPLACES ARE INSTALLED, ENSURE THAT VENTILATION AIR IS PROVIDED DIRECTLY TO THE FIREPLACE AND CONDUCT COMBUSTION SAFETY TESTS TO ENSURE THE FIREPLACE WILL NOT BE BACKDRAFTED BY OTHER EXHAUST FANS IN THE HOME.

PROVIDE INSTALLATION OF A SCOPE FROM THE FIRE BOX TO THE EXTERIOR OF THE HOME, EITHER THOUGH DIRECT VENT (WALL) OR VERTICALLY THOUGH THE ROOF.

* ALWAYS INSTALL AS PER MANUFACTURERS SPECS
* BUILDER TO VERIFY INSTALLATION INSTRUCTIONS

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

MAIN FLOOR PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

A-1.0

SHEET SCALE: 1/4" = 1'-0"

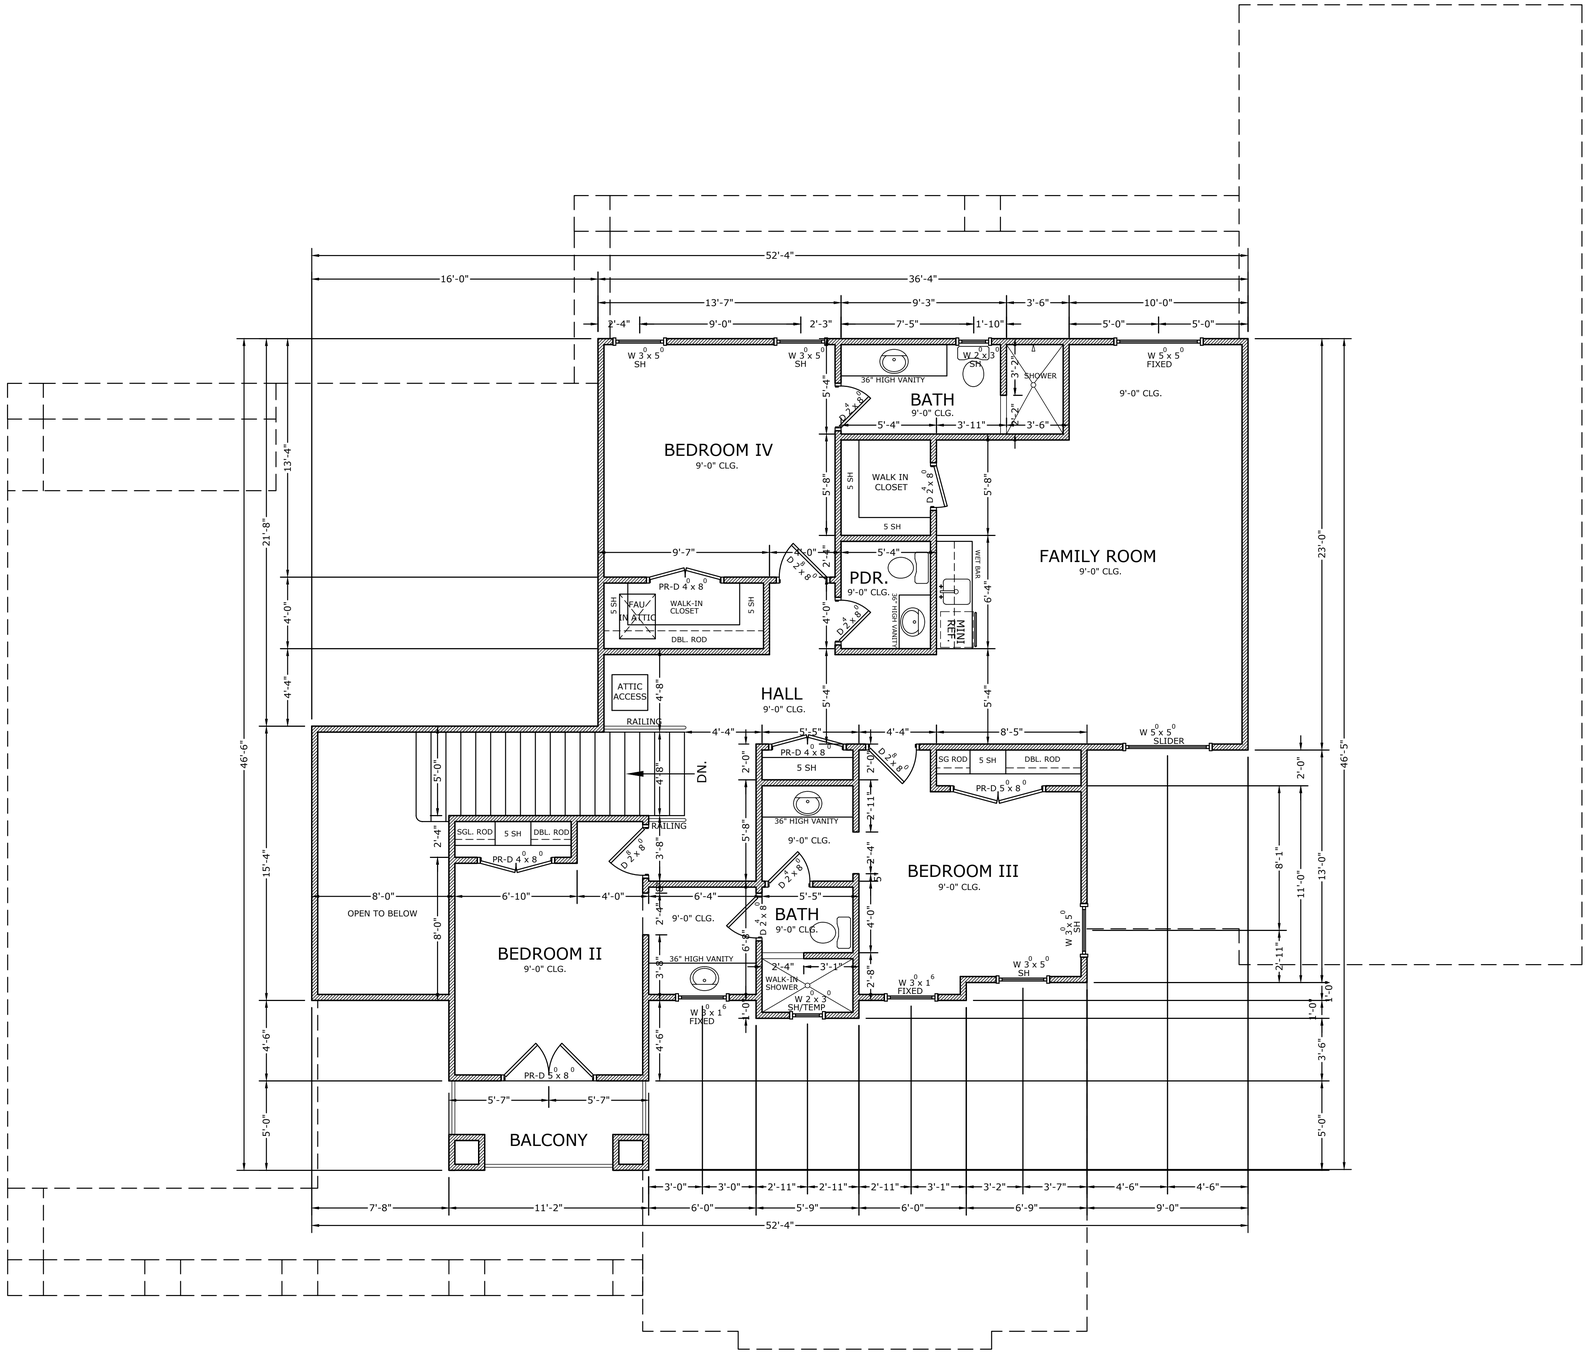

UPPER LEVEL FLOOR PLAN

SCALE: 1/4" = 1'-0"

MAIN LEVEL LIVING	2,267
UPPER LEVEL LIVING	1,354
TOTAL LIVING AREA	3,621
BALCONY	56
GARAGE/STO./MECH	1,691
ENTRY PORCH	390
COVERED PATIO	486
TOTAL FLOOR AREA	6,244

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

UPPER/LOWER FLOOR PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT © CORTNEY HASLEM DESIGNS 2026

DATE: 7/29/26

REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

A-1.1

SHEET SCALE: 1/4" = 1'-0"

FOUNDATION NOTES:

1. BUILDER TO VERIFY THAT ALL FOOTINGS/FOUNDATIONS TO COMPLY W/ SOILS REPORT AND FOUNDATION ENGINEERING REQUIREMENTS.
2. CONTRACTOR TO COORDINATE SETBACK/FOUNDATION CLEARANCES WITH DEVELOPER AND VERIFY EXACT BUILDING LOCATION PRIOR TO PLACING CONCRETE.
3. ALL FOOTINGS/FOUNDATIONS TO COMPLY W/ SOILS REPORT AND FOUNDATION ENGINEERING REQUIREMENTS.
4. ELECTRICIAN TO VERIFY LOCATION OF UFER GROUND.

FOUNDATION PLAN

SCALE: 1/4" = 1'-0"

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

FOUNDATION PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

A-2

SHEET SCALE: 1/4" = 1'-0"

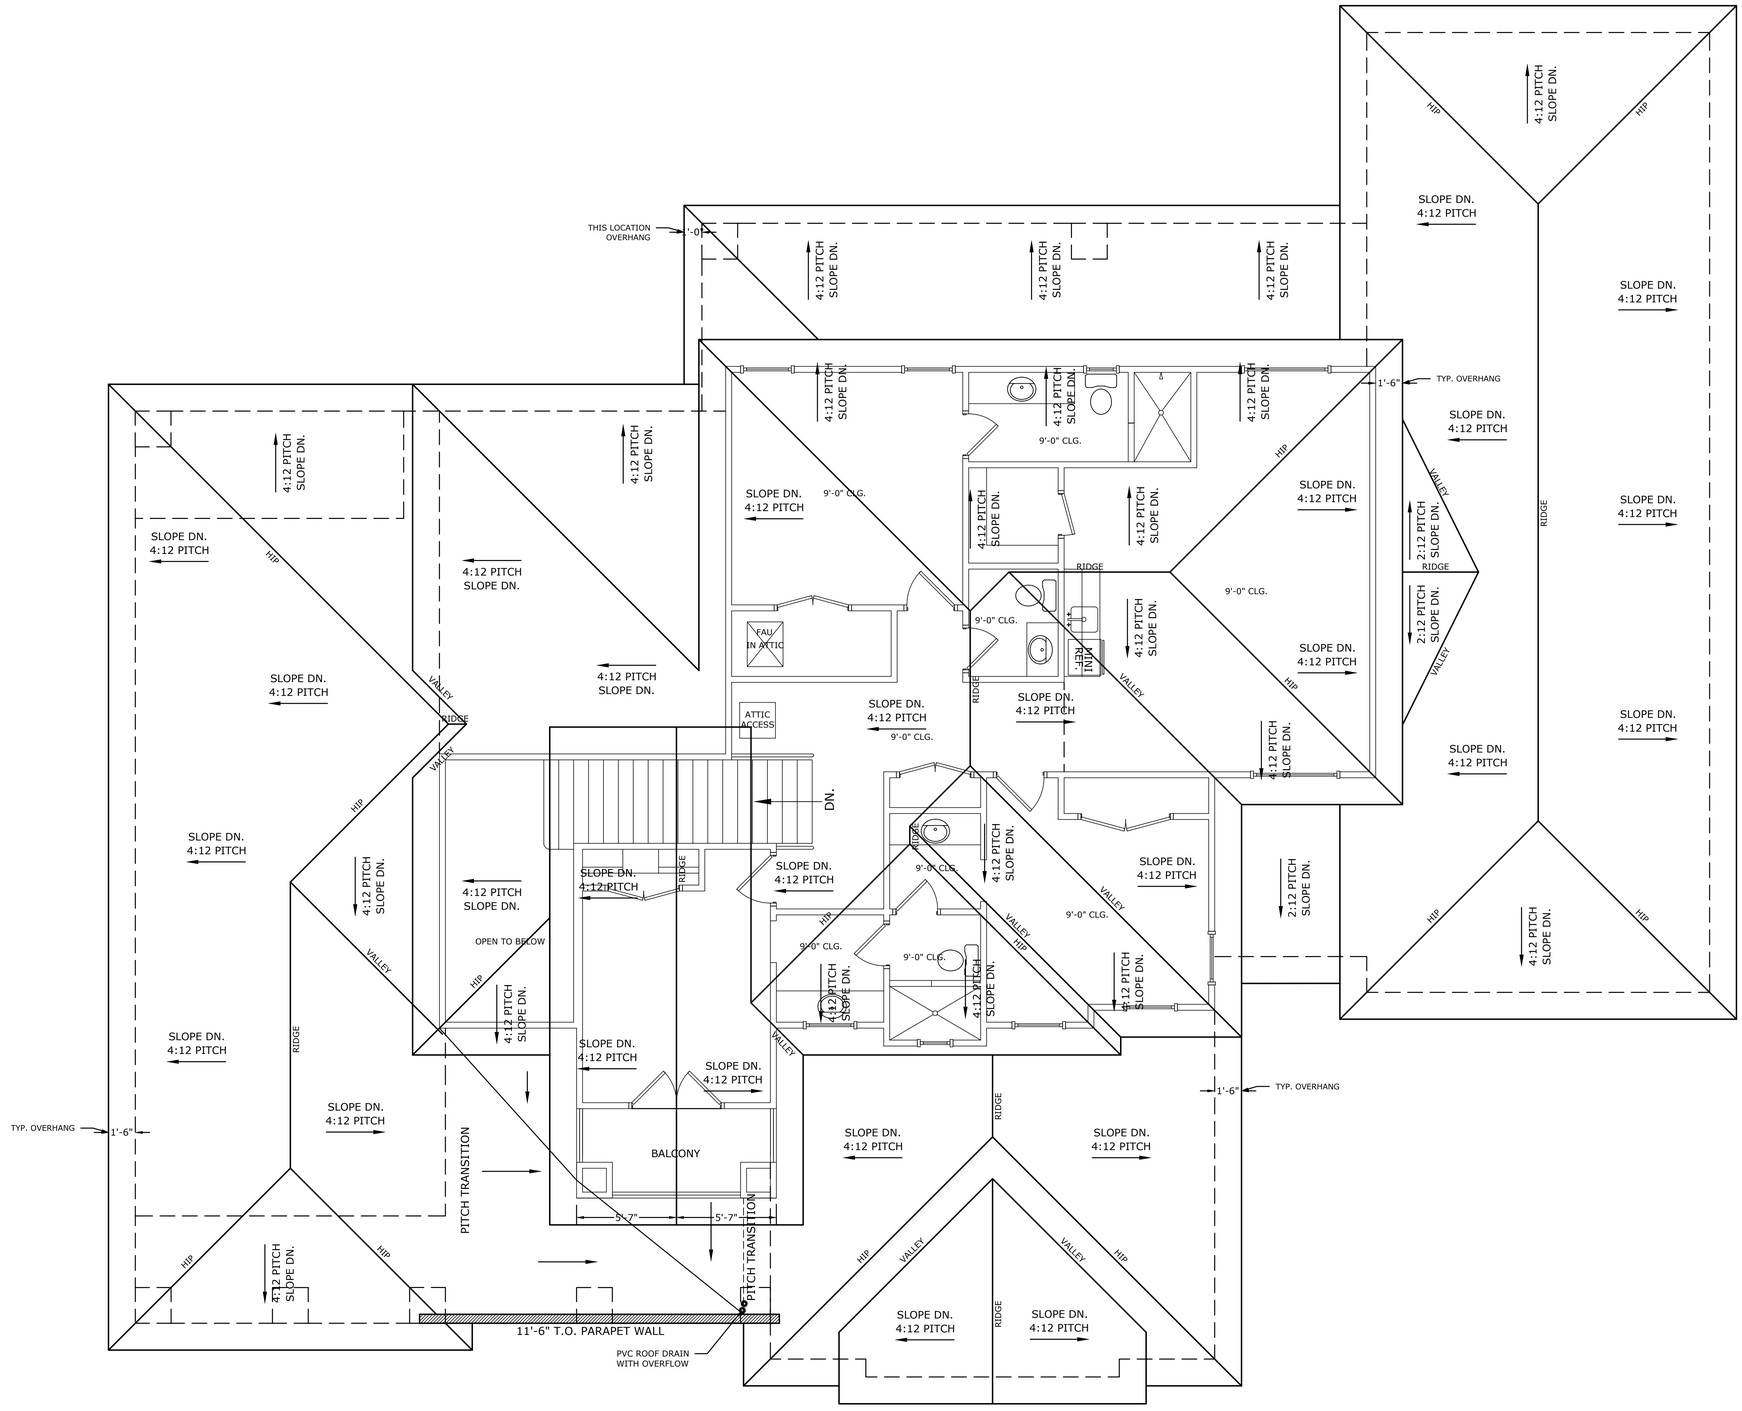

ROOF NOTES:

1. ROOF VENTILATION AND ACCESS TO COMPLY WITH 2021 I.R.C.
2. BRACING IS TO COMPLY WITH 2021 I.R.C.
3. ALL GYPSUM BD. APPLICATIONS TO COMPLY WITH 2021 I.R.C.
4. ENCLOSED ATTIC AND RAFTER VENTILATION SHALL COMPLY WITH CURRENT I.R.C. UNLESS NOTED OTHERWISE. (1/150 OF SPACE FOR GABLE TYPE VENTS) (1/300 OF SPACE VENTILATED FOR GABLE-EAVE VENT COMBINATIONS)
5. HEIGHT OF CHIMNEYS TO BE 2'-0" MINIMUM ABOVE 10'-0" AWAY FROM ANY PORTION OF THE BUILDING OR ROOF -
6. ALL UNDERLAYMENTS SHALL BE RATED FOR THE TEMPERATURE RANGE OF THE LOCAL ENVIRONMENT.
7. BUILDER AND/OR TRUSS MANUFACTURER IS TO VERIFY TRUSS LAYOUT.

ATTIC VENTILATION

5275 / 150 = 35.17 (35 TOTAL VENTS)

INSTALL VENTS AS FOLLOWS:
15 EXHAUST VENTS NEAR RIDGE OF ROOF
14 INTAKE VENTS ON SOFFITS/UNDER EAVE

LOCATION AND SUPPLIER OF ATTIC VENTILATION TO BE VERIFIED BY THE ROOFING COMPANY

ROOF OVERVIEW

SCALE: 1/4" = 1'-0"

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

ROOF OVERVIEW

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT © CORTNEY HASLEM DESIGNS 2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52


BY: CHD PLANS

A-3

SHEET SCALE: 1/4" = 1'-0"

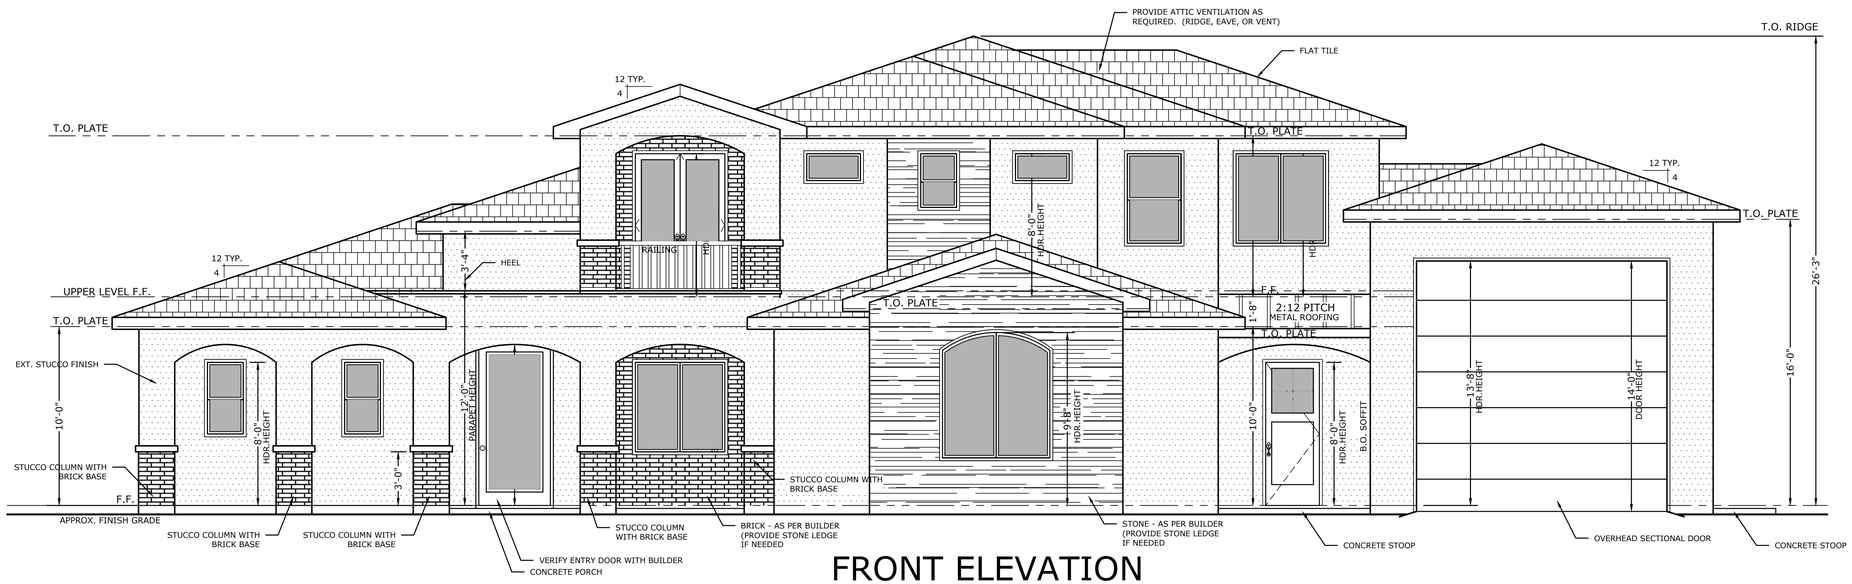

FRONT ELEVATION

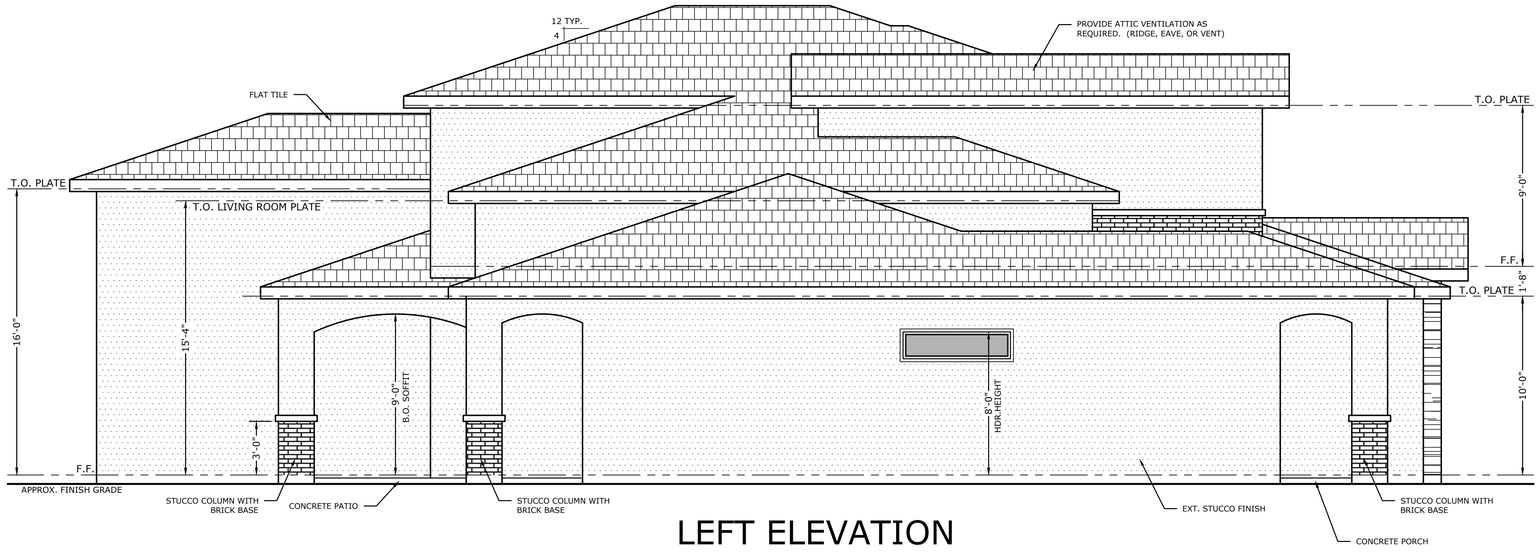

LEFT ELEVATION

ELEVATIONS I

SCALE: 1/4" = 1'-0"

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

ELEVATIONS I

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52


BY: CHD PLANS

A-4.0

SHEET SCALE: 1/4" = 1'-0"

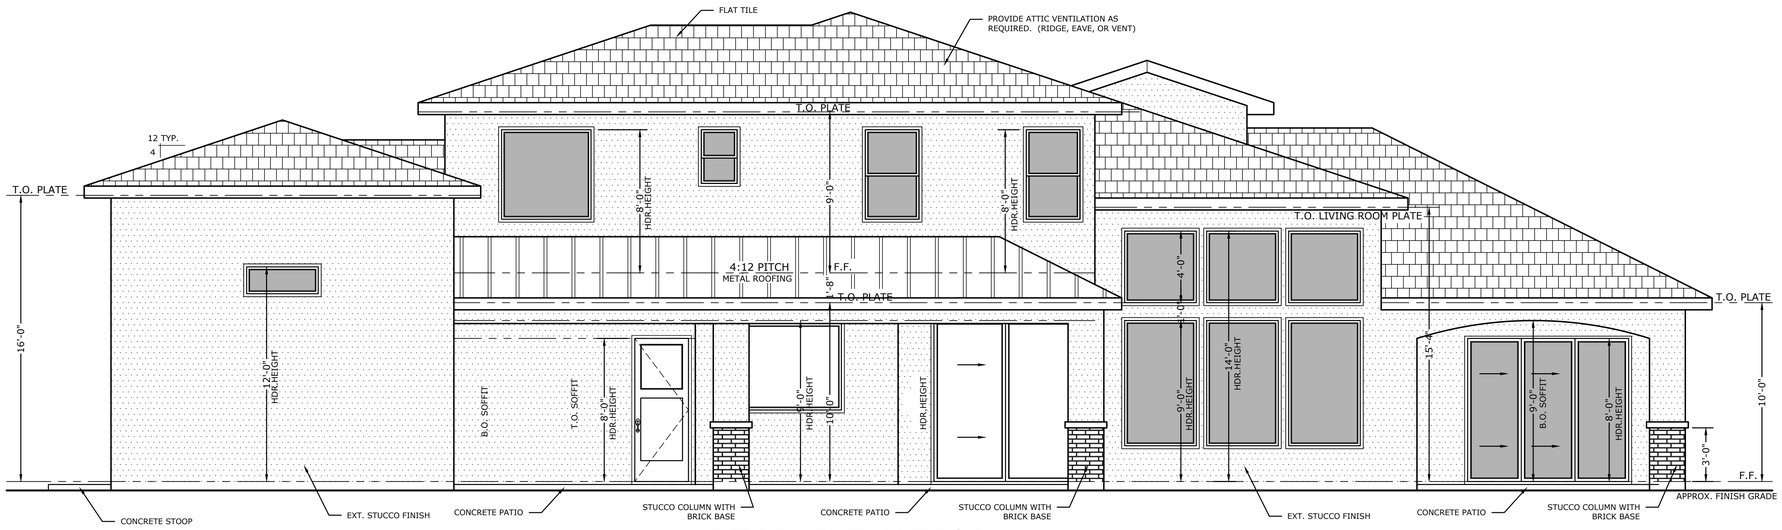

REAR ELEVATION

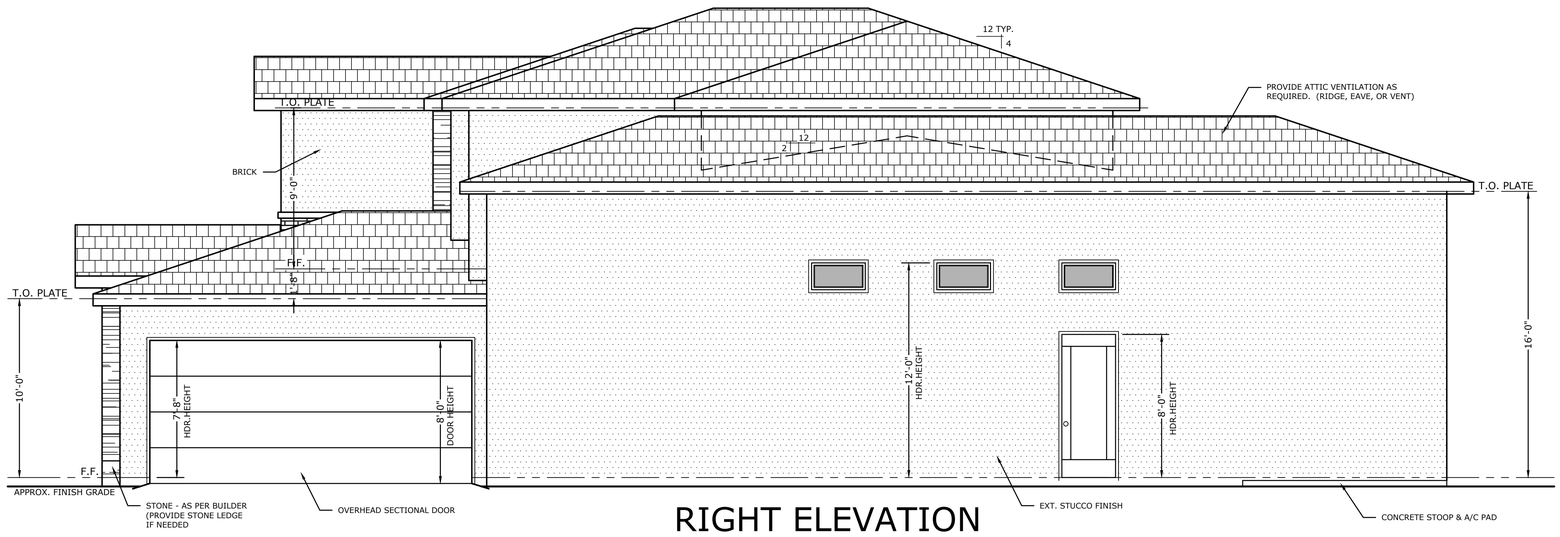

RIGHT ELEVATION

ELEVATIONS II

SCALE: 1/4" = 1'-0"

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

ELEVATIONS II

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

A-4.1

SHEET SCALE: 1/4" = 1'-0"

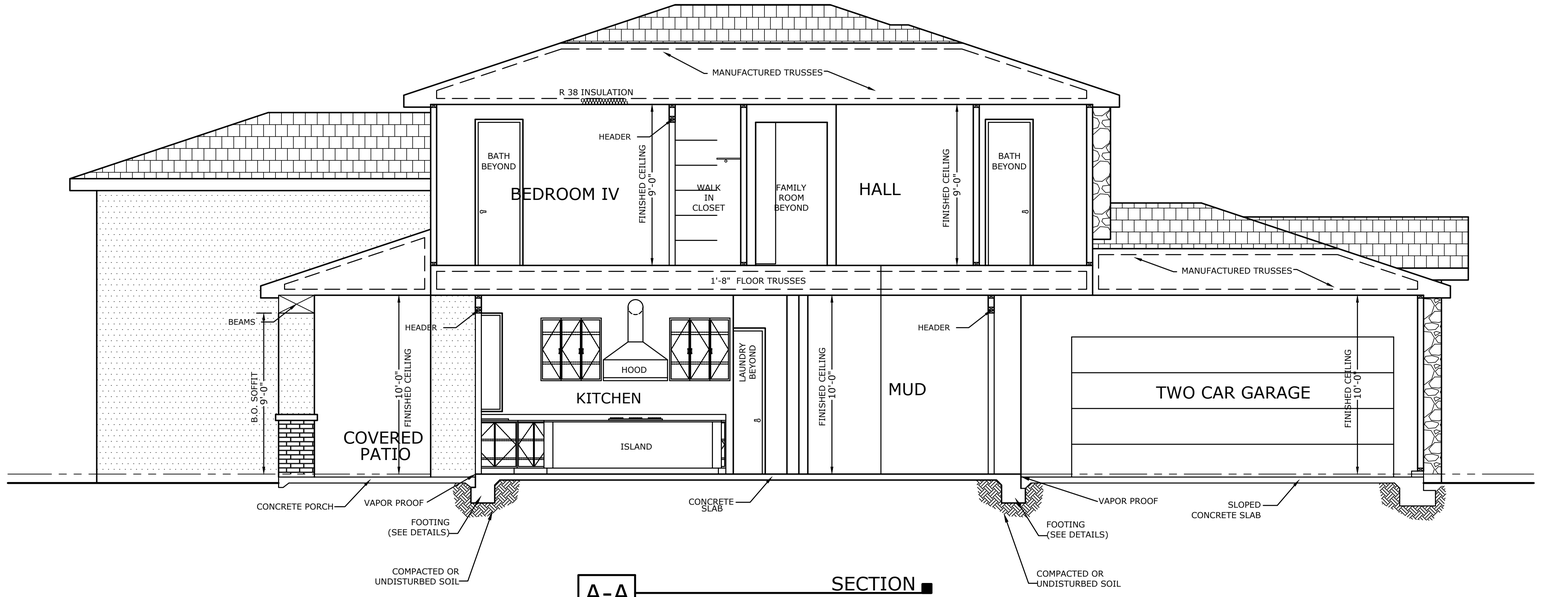


A-A SECTION

SCALE: 1/4" = 1'-0"


STAIR NOTES:

STAIR-SETS CONSTRUCTED FOR COMMERCIAL AND MULTI-FAMILY BUILDINGS MUST MEET THE STANDARDS OUTLINED IN THE IRC BUILDING CODE. BASIC REQUIREMENTS ARE TREAD DEPTH MIN 11", RISER HEIGHT MIN. 4" MAX. 7" RESIDENTIAL 10" TREAD AND MAX. 7 ¾" RISERS, IF RISERS ARE CLOSED A 1 1/4" MAX. NOSING IS REQUIRED. HANDRAILS MUST BE MIN. OF 1 1/4" AND MAX. 2" DIA. AND SHALL BE NOT LESS THAN 34" NOR MORE THAN 38" MEASURED VERTICALLY ABOVE THE NOSE OF THE TREAD. GUARDRAILS MUST BE AT LEAST 42" HIGH ALONG OPEN SIDED PLATFORMS AND 34' HIGH ON STAIRS NOT OVER 20' HIGH.

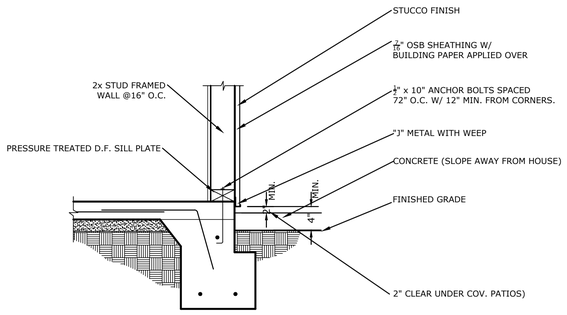


EXTERIOR FOOTING W/ CONCRETE PATIO 1

SCALE: NO SCALE

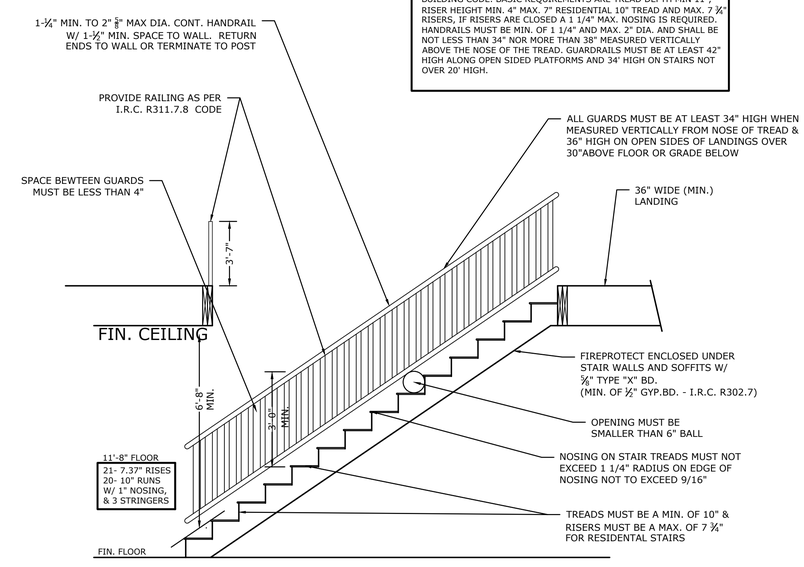

TYPICAL STAIR DETAIL 2

SCALE: NO SCALE

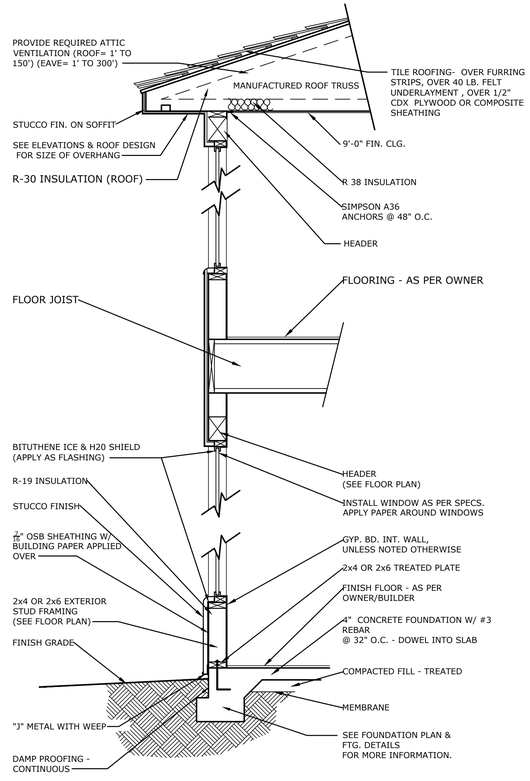

WALL SECTION 3

SCALE: NO SCALE

SECTION AND DETAILS

SCALE: AS NOTED

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

SECTION AND DETAILS

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26


REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

A-5

SHEET SCALE: AS NOTED

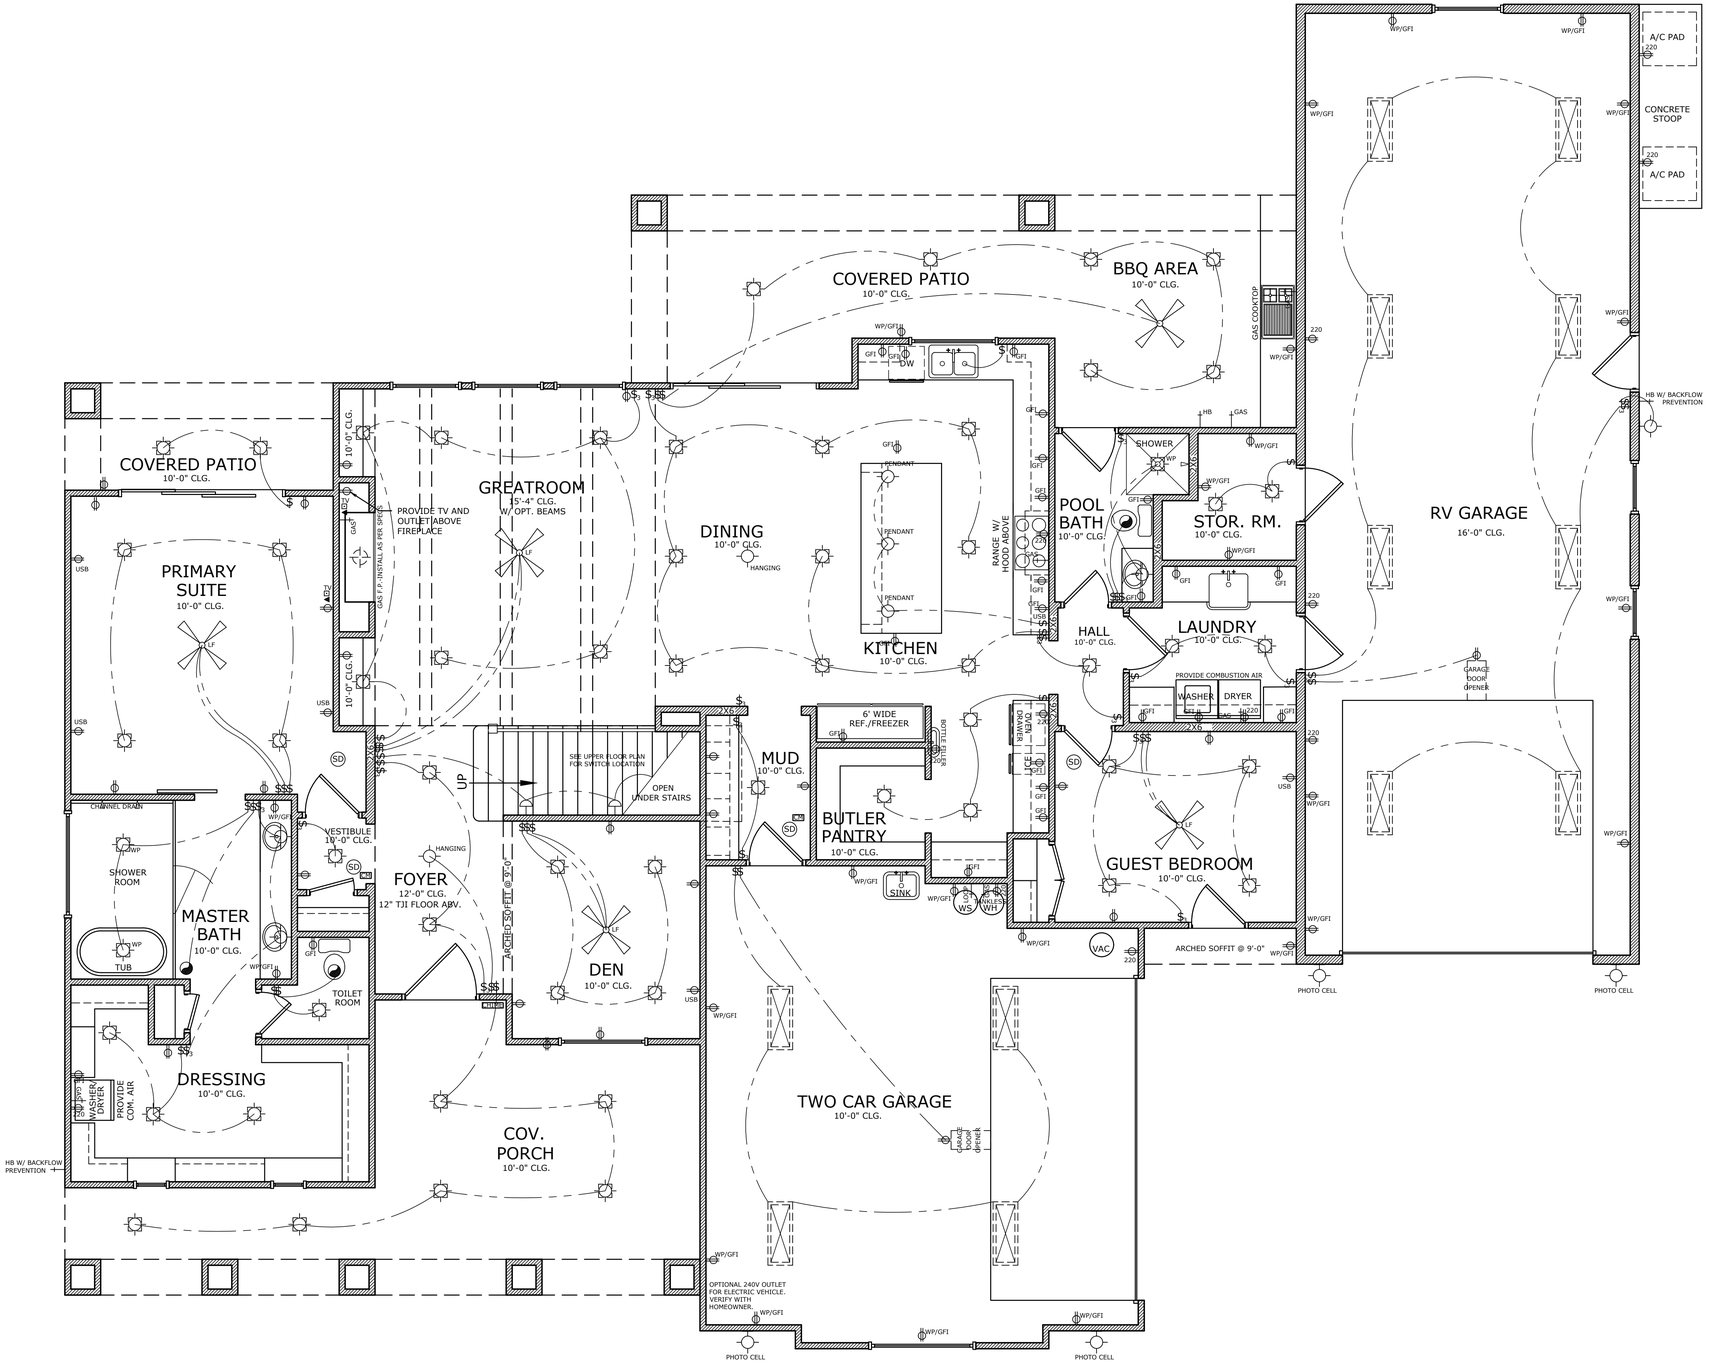

MAIN LEVEL ELECTRICAL PLAN

SCALE: 1/4" = 1'-0"

ELECTRICAL LEGEND

- CEILING MOUNTED LIGHT
- WALL MOUNTED LIGHT
- RECESSED LIGHT
- SCONCE LIGHT
- CEILING FAN
- FLOURESCENT LIGHT BOX
- SD — SMOKE DETECTOR
- OUTLET
- $ — SWITCH
- $3 — 3-WAY SWITCH
- $4 — 4-WAY SWITCH
- TV — CABLE TELEVISION OUTLET
- TELEPHONE JACK
- LF — LIGHT / FAN
- GFI — GROUND-FAULT INTERRUPTER
- WP — WEATHER-PROOF
- HB — HOSE BIBB
- SUB PANEL
- CHIME — CHIME BOX / DOOR BELL
- EXHAUST FAN
- CM — CARBON MONOXIDE

ELECTRICAL NOTES:

1. OUTLET PLACEMENT SHALL COMPLY WITH CURRENT CODE.
2. MINIMUM FIXTURE CLEARANCE TO SHELVING IS 1'-2".
3. SMOKE DETECTORS TO COMPLY WITH CURRENT CODE.
4. GFI OUTLETS REQUIRED WITHIN 6'-0" OF SINKS, AT GARAGES, BATHROOMS, OUTSIDE AND UNFINISHED AREAS.
5. OUTLETS TO BE 1'-4" ABOVE FINISHED FLOOR IN GARAGE.
6. UTILITY METERS, PANEL BOX, AND UFER GROUND TO BE LOCATED BY ELECTRICIAN.
7. ALLOW "6-PAIR DROP" FOR TELEPHONE SERVICE.
8. ALLOW FOR ARC FAULT IN ALL BEDROOMS.
9. ALL OUTLETS TO BE TAMPER PROOF.
10. PROVIDE AFCI PROTECTION PER E3902.16 (BEDROOMS, KITCHENS, AND LAUNDRY AREAS)

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

MAIN FLOOR
ELECTRICAL PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026


DATE: 7/29/26

REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

E-1.0
SHEET SCALE: 1/4" = 1'-0"

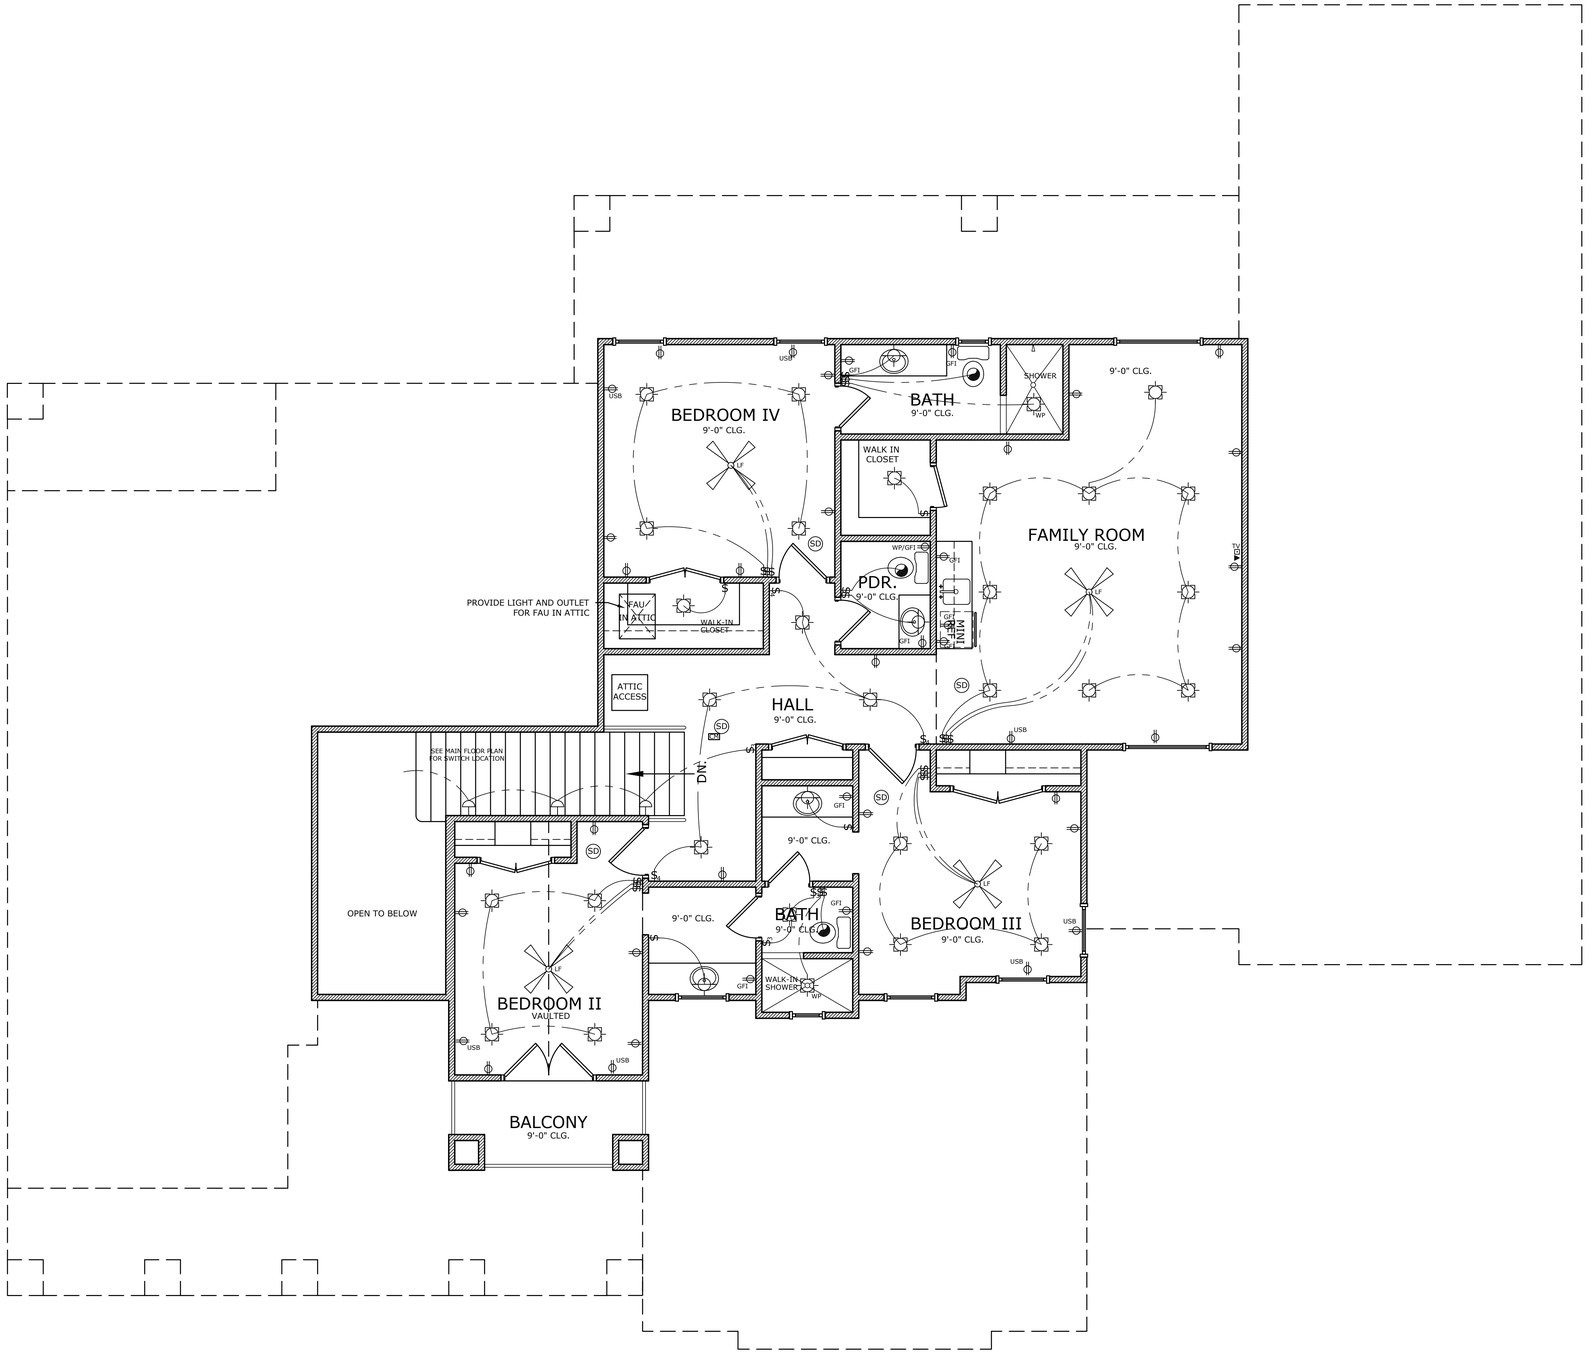

UPPER LEVEL ELECTRICAL PLAN

SCALE: 1/4" = 1'-0"

ELECTRICAL LEGEND

- CEILING MOUNTED LIGHT
- WALL MOUNTED LIGHT
- RECESSED LIGHT
- SCONCE LIGHT
- CEILING FAN
- FLOURESCENT LIGHT BOX
- SD — SMOKE DETECTOR
- OUTLET
- $ — SWITCH
- $3 — 3-WAY SWITCH
- $4 — 4-WAY SWITCH
- TV — CABLE TELEVISION OUTLET
- TELEPHONE JACK
- LF — LIGHT / FAN
- GFI — GROUND-FAULT INTERRUPTER
- WP — WEATHER-PROOF
- HB — HOSE BIBB
- SUB PANEL
- CHIME — CHIME BOX / DOOR BELL
- EXHAUST FAN
- CM — CARBON MONOXIDE

ELECTRICAL NOTES:

1. OUTLET PLACEMENT SHALL COMPLY WITH CURRENT CODE.
2. MINIMUM FIXTURE CLEARANCE TO SHELVING IS 1'-2".
3. SMOKE DETECTORS TO COMPLY WITH CURRENT CODE.
4. GFI OUTLETS REQUIRED WITHIN 6'-0" OF SINKS, AT GARAGES, BATHROOMS, OUTSIDE AND UNFINISHED AREAS.
5. OUTLETS TO BE 1'-4" ABOVE FINISHED FLOOR IN GARAGE.
6. UTILITY METERS, PANEL BOX, AND UFER GROUND TO BE LOCATED BY ELECTRICIAN.
7. ALLOW "6-PAIR DROP" FOR TELEPHONE SERVICE.
8. ALLOW FOR ARC FAULT IN ALL BEDROOMS.
9. ALL OUTLETS TO BE TAMPER PROOF.
10. PROVIDE AFCI PROTECTION PER E3902.16 (BEDROOMS, KITCHENS, AND LAUNDRY AREAS)

CORTNEY HASLEM DESIGNS
CUSTOM HOME PLANS
1240 E. 100 S. #7
ST. GEORGE.UT 84790
435-656-8777

UPPER/LOWER LEVEL ELECTRICAL PLAN

PARADE OF HOME 2027
PEACH SPRINGS LOT 52
HURRICANE, UT

COPYRIGHT©
CORTNEY HASLEM DESIGNS
2026

DATE: 7/29/26

REVISED:
7/13/26
7/2/26

JOB #: PS-52

BY: CHD PLANS

E-1.1

SHEET SCALE: 1/4" = 1'-0"